


VT30F

厚さ 0.3 mm 重さ 400 g/m²

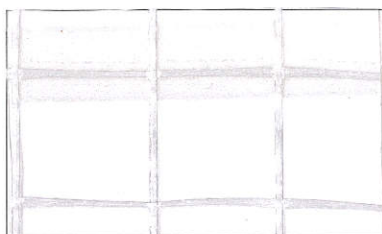


VT30FS

厚さ 0.3 mm 重さ 400 g/m²




VT30FT

厚さ 0.3 mm 重さ 400 g/m²

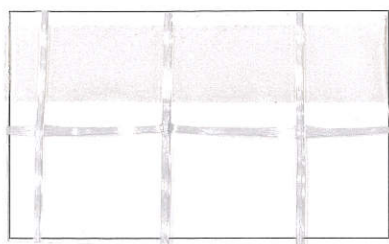


VT50B

厚さ 0.5 mm 重さ 620 g/m²

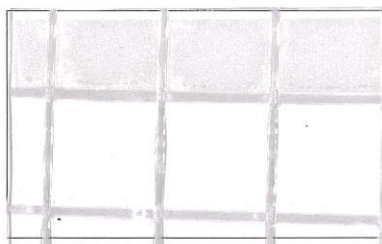


VT50TSB

厚さ 0.5 mm 重さ 670 g/m²

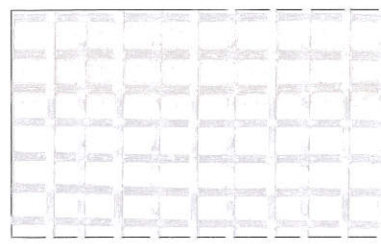

E-2238FW

厚さ 0.38 mm 重さ 325 g/m²

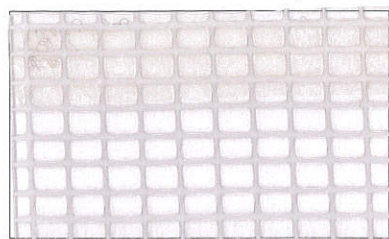


VT80S

厚さ 0.8 mm 重さ 750 g/m²




CT-1030-5

厚さ 0.35 mm 重さ 435 g/m²

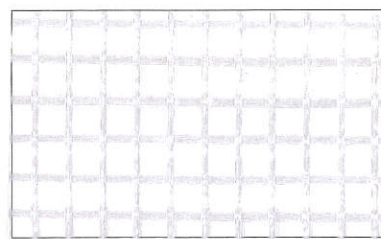

CT-1205-TN ※耐熱 100℃

厚さ 0.47 mm 重さ 400 g/m²

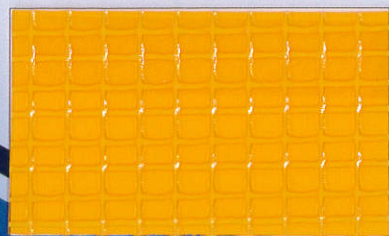


ET-1600

厚さ 0.86 mm 重さ 900 g/m²



E-6000FYW

厚さ 0.55 mm 重さ 735 g/m²

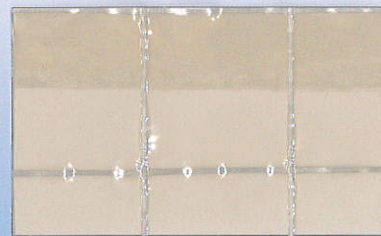

ハイパー遮熱透明

厚さ 0.3 mm 重さ 390 g/m²

